



8900 NORTH 55TH STREET | MILWAUKEE, WISCONSIN 53223 | 414.354.0300 | FAX 414.354.7905 | U-LINE.COM

P/N ZLITIM **5/2011** © U-LINE Corporation Printed in the USA



PRODUCT COLLECTION

WINE CAPTAIN® MODELS

BEVERAGE CENTERS

GLASS DOOR REFRIGERATORS

REFRIGERATORS

ICE MAKERS / ICE MACHINES

COMBO® MODELS / RF

RESIDENTIAL

OUTDOOR

COMMERCIAL

ADA HEIGHT COMPLIANT

ENERGY EFFICIENT

MARINE / RV



THE BUILT-IN UNDERCOUNTER MARKET LEADER SINCE 1962

UNSURPASSED UNDERCOUNTER PRODUCT COLLECTION

- 4 MODULAR 3000 SERIES
- 8 WINE CAPTAIN® MODELS
- 12 BEVERAGE CENTERS
- 14 GLASS DOOR REFRIGERATORS
- 18 REFRIGERATORS
- 22 ICE MAKERS / ICE MACHINES
- 26 COMBO® MODELS / REFRIGERATOR–FREEZER
- 30 OUTDOOR
- 32 COMMERCIAL
- 33 ADA HEIGHT COMPLIANT
- 34 ENERGY EFFICIENT
- 36 MARINE / RV
- 40 INTEGRATION
- 45 SPECIFICATIONS AT A GLANCE

BUILDING ON THREE GENERATIONS OF INNOVATION

For nearly five decades and three generations, U-Line continues to be the leader in innovation, quality and value in the premium built-in undercounter ice making, refrigeration and wine preservation market. U-Line has captivated those with an appreciation for the finer things with exceptional functionality, style, inspired innovation and attention to even the smallest details. We are known and respected for our unwavering dedication to product design, quality and selection.

In 1962, Henry Uihlein founded U-Line Corporation as an outgrowth of Ben-Hur Freezer Company and was the first to develop and patent an automatic stand-alone undercounter residential ice maker. His foresight and determination to develop new ideas and to succeed when there were no clear guidelines or solutions are evident today. The newest Uihlein generation continues to build upon the family’s innovative legacy at the Milwaukee, Wisconsin based business by providing continuity and vision from which new designs and technology continue to be born.

Today the complete U-Line product collection includes Ice Makers, Wine Captain® Models, Combo® Models, a Refrigerator / Freezers, Refrigerators, Drawer Models and Beverage Centers. The U-Line brand offers products in the 1000 Series, 2000 Series and the Modular 3000 Series. The 1000 Series offers a more targeted priced product with appropriate features, while the 2000 Series offers upscale features, advanced technology and specialized product families. Our Modular 3000 Series provides sleek design and versatile temperature settings with our U-Select™ Control. U-Line’s approach to its breadth of products, multiple price points and features allows a choice and product that will fit any lifestyle.



Henry Uihlein, Founder

DESIGNED, ENGINEERED AND ASSEMBLED IN WISCONSIN, USA



MODULAR 3000 SERIES - THE FUTURE OF PRESERVATION

U-Line is proud to introduce our newest evolution in modular refrigeration. Building upon our legacy of innovation, we continue to develop the highest quality ice makers, refrigerators and wine preservation models with premium styling, versatility and convenience to fit your lifestyle.

Modular refrigeration is putting the right product at the right place at the right temperature, providing optimal accessibility and preservation. Nobody understands this better than U-Line. We have been creating built-in undercounter products for inside and outside the home for nearly fifty years. U-Line's Modular 3000 Series gives you the freedom to design your kitchen or any other area with convenience and your storage needs addressed. Doesn't it make sense to store your fruits and vegetables at the optimal temperature that helps to preserve shelf life and where you use them the most? With the Modular 3000 Series, you can easily integrate a customized refrigerator next to your prep area for easy access and better tasting, longer lasting food.

U-Line's Modular 3000 Series incorporates 18" and 36" wide products that integrate into various cabinetry styles while providing design flexibility and immediate access to your food and beverages. Our new Modular 3000 Series models enable you

to design the space that fits your lifestyle; be it multiple cooks in the kitchen, entertaining, a family with kids or just additional, quick and easy access to your most commonly used items. With the ability to set storage zones for specific types of food, whether meat and dairy, root vegetables or spices, U-Line products allow you the flexibility to adjust temperatures to accommodate what you need when you need it. It is now possible to build a custom undercounter configuration that meets your specific refrigeration needs.

The Modular 3000 Series, incorporating our U-Select™ Control, provides you with the ability to choose settings that correspond to the types of food and beverages you store. U-Select™ Control settings enable you to keep food fresher longer and taste better by providing the perfect preservation environments.

Simple elegance is what defines the Modular 3000 Series aesthetic. The clean lines, concealed and covered hinges, fully adjustable and integrated grille, theatre LED lighting and black interiors with graphite and tinted accents are all thoughtful elements designed to become an elegant but subtle statement. These design elements make it easy for our product to blend in and fit seamlessly in your environment.



BUILT-IN TO STAND OUT

U-Line's Modular 3000 Series was designed from the ground up to integrate easily into your existing cabinetry with a clean, modern and minimalist aesthetic. All Modular 3000 Series models fully integrate with overlay/face frame, inset, and European/frameless cabinet styles and install seamlessly into standard 24" depth cabinet bases. A zero clearance, flush installation is easily achieved with our concealed hinge, front ventilation system, fully adjustable toe-kick and doors and rear leveling system that is accessible from the front of the unit.

All Modular 3000 Series models are available in stainless steel or overlay options. The stainless models are equipped with a commercial stainless steel handle that is interchangeable with our professional handle option. The overlay option provides the simplest method of adding custom panels or frames for a truly integrated installation.



Added integration with adjustable, overlay ready toe-kick and rear leveling legs adjustable from front of unit



Robust concealed and covered hinge with built-in stop and closer mechanism



Ease of installation of custom overlays to seamlessly blend with cabinetry



U-SELECT™ CONTROL: REFRIGERATION - THE MODULAR 3000 SERIES

U-Line's Modular 3000 Series is built for perfect preservation. Our U-Select™ Control manages the refrigeration environment to keep food fresher longer and taste better with the ability to choose the appropriate temperature settings for the various types of food you store. The U-Select™ Control Quick Chill feature rapidly chills food and beverages at the lowest temperature setting in each mode for a designated period of time. This feature is available in all modes except Red Wine.

The U-Select™ Control for refrigerator models is programmed with five distinct settings. Each setting has an optimal set point within a designated temperature range that can be adjusted for personal preference.

Deli mode - Perfect for preserving any kind of meat, fish, poultry, butter or other dairy products and for maintaining the flavors of garlic, oils, nuts and condiments. Deli mode has a temperature range between 34° and 40° with a set point of 36°.

Market mode - With a temperature range between 34° and 40° and a set point of 38°, Market mode will keep everything from the local farmers market fresh and vibrant. This mode is ideal for most fruits, vegetables, berries and leafy greens.

Pantry mode - Best used for storing dry goods such as breads and baking ingredients and preserving the freshness of spices and seasonings. Pantry mode has a temperature range between 34° and 70° with a set point of 42°.

Root Cellar mode - The optimal way to maintain the freshness of root vegetables including potatoes and onions, as well as citrus fruit, melons, peppers, beans, cucumbers and cut vegetables. Root Cellar mode has a temperature range between 45° and 55° with a set point of 50°.



Deli mode has a temperature range between 34° and 40° with a set point at 36°.



Market mode has a temperature range between 34° and 40° with a set point at 38°.



Pantry mode has a temperature range between 34° and 70° with a set point at 42°.



Root Cellar mode has a temperature range between 45° and 55° with a set point at 50°.



U-SELECT™ CONTROL: BEVERAGES - THE MODULAR 3000 SERIES

As the first North American manufacturer of a residential wine preservation unit, we understand proper storage is critical for wine. The U-Select™ Control manages cellar like conditions to maximize the preservation of wine. With digitally controlled convection cooling, these models rapidly achieve and consistently hold the perfect temperature whether it is for your prized Cabernet or a bottle of fine Champagne. The U-Select™ Control makes it quick and easy to distinguish and switch between modes or settings.

There are four distinct settings designed to provide precise refrigeration and maximize preservation: Beverage, Sparkling, White and Red.

Beverage mode - The ideal setting to rapidly chill mineral waters, sparkling water or handcrafted ales ensuring that beverages are always at the perfect temperature. Beverage mode has a temperature range between 34° and 65° with a set point of 38°.

Sparkling Wine mode - Designed to be celebration ready. This setting will keep the champagne bubbles chilled and is also perfect for sweeter whites and dessert wines. Sparkling Wine mode has a temperature range between 38° and 50° with a set point of 45°.

White Wine mode - Keeps white wines crisp, bright and ready for dinner or an afternoon with friends. From Chardonnay to Riesling, the whites will always strike the perfect note. White Wine mode has a temperature range between 45° and 55° with a set point of 50°.

Red Wine mode - Allows you to cradle those special young reds like Bordeaux or bold Zinfandels for long term storage or you can set the temperature a little warmer for maintaining your everyday Cabernets at your preferred serving temperature. Red Wine mode has a temperature range between 55° and 65° with a set point of 55°.



Beverage mode in both refrigerator and all Beverage Centers have a temperature range between 34° and 65° with a set point of 38°




Sparkling mode has a temperature range between 38° and 50° with a set point of 45°

White wine mode has a temperature range between 45° and 55° with a set point of 50°

Red wine mode has a temperature range between 55° and 65° with a set point of 55°

Designed for Preservation.

As the first North American appliance manufacturer to develop a residential wine preservation unit, we understand proper storage is critical for wine. Three distinct preservation options are available in the U-Line Wine Captain® Models. Our signature triple-zone design adds versatility by providing three temperature zones to preserve wines at their optimal serving temperatures. The dual-zone models allow each zone of the cabinet to be set at independent temperatures. The 2175WCC and 3018WC provide one single temperature zone throughout the unit.

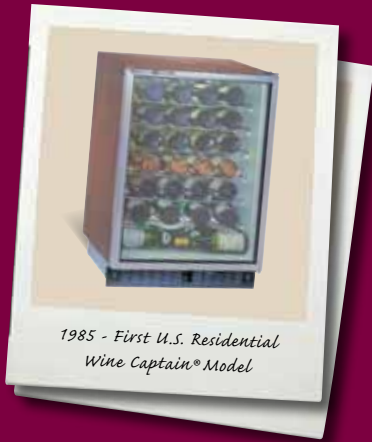

1985 - First U.S. Residential Wine Captain® Model



U-Line 2175WCC Wine Captain® Model











ALL MODELS – All U-Line Wine Captain® Models use LowE coated, argon gas filled thermopane glass to protect and preserve wines from potentially harmful UV rays and efficiently hold and maintain temperatures



2000/3000 SERIES – Full extension slide out wine racks with black vinyl coating allow for easy access and prevent bottles from sliding



SELECT MODELS – U-Line Wine Captain® Models provide two racks to accommodate larger diameter wine and champagne bottles

								
	1075WC	1115WC	1175WC	2115WC	2175WCC	2275ZWC	3018WC	3036WCWC
Series Number / Width	1000 Series / 24"	1000 Series / 15"	1000 Series / 24"	2000 Series / 15"	2000 Series / 24"	2000 Series / 24"	3000 Series / 18"	3000 Series / 36"
Wine Bottle Capacity (.75L)	48	24	48	24	48	43	31	62
Available Finishes	Stainless	Stainless, Black	Stainless, Black	Stainless, Overlay	Stainless, Overlay, Solid Door Overlay	Stainless, Overlay, Solid Door Overlay	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Reversible	Reversible	Reversible	Stainless or Overlay: Reversible	Stainless or Overlay: Reversible	Stainless or Overlay: Reversible	Stainless and Overlay: Left or Right Hinged	N/A
Stainless Door Type	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door
Wine Rack Details	Black powder coated, 3/4 extension racks	Black powder coated, 3/4 extension racks	Black powder coated, 3/4 extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks
Temperature Management System	Mechanically controlled triple-zone	Digitally controlled triple-zone	Digitally controlled triple-zone	Digitally controlled triple-zone	Digitally controlled single-zone	Independently digitally controlled dual-zone	Digitally controlled single-zone	Independently digitally controlled dual-zone
Temperature Range	40 to 60°F	40 to 60°F	40 to 60°F	40 to 60°F	38 to 60°F	34 to 60°F	38 to 65°F	38 to 65°F
Controls Type	Mechanical dial	Touch pad digital	Touch pad digital	Touch glass digital	Touch glass digital	Touch glass digital	U-Select™ Control	U-Select™ Control
Sabbath / Blackout Mode	N/A	●	●	●	●	●	●	●
Toe Kick Accepts Overlay/Adjustable	N/A	N/A	N/A	Yes/No	Yes/No	Yes/No	Yes/Adjustable	Yes/Adjustable
UL Listing	Residential	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential	Residential	Residential



Stainless

1075WC **1000 SERIES**
FEATURES

- Wine bottle capacity up to 48 bottles (.75L)
- Lighted white interior
- Solid beech wood trimmed, 3/4 extension black powder coated wine racks
- Mechanically controlled triple temperature zones
- Temperature range 40 to 60°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Locking door model available*



Stainless



Black

1115WC** **1000 SERIES**
FEATURES

- Wine bottle capacity up to 24 bottles (.75 L)
- Touch pad digital control featuring easy view command center
- Solid beech wood trimmed, 3/4 extension black powder coated wine racks
- Digitally controlled triple temperature zones
- Temperature range 40 to 60°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door



Stainless



Overlay



Solid Overlay

2175WCC **2000 SERIES**
FEATURES

- Wine bottle capacity up to 48 bottles (.75L)
- Touch glass digital control featuring easy view command center
- Solid beech wood trimmed, full extension black vinyl coated wine racks
- Digitally controlled single zone convection cooling system
- Temperature setting from 38 to 60°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Solid door overlay model available



Stainless



Overlay



Solid Overlay

2275ZWC **2000 SERIES**
FEATURES

- Wine bottle capacity up to 43 bottles (.75L)
- Touch glass digital control featuring easy view command center
- Solid beech wood trimmed, full extension black vinyl coated wine racks
- Digitally controlled dual zone system, temperature settings can be set independently
- Temperature setting from 34 to 60°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Solid door overlay model available



Stainless



Black

1175WC** **1000 SERIES**
FEATURES

- Wine bottle capacity up to 48 bottles (.75L)
- Touch pad digital control featuring easy view command center
- Solid beech wood trimmed, 3/4 extension black powder coated wine racks
- Digitally controlled triple temperature zones
- Temperature range 40 to 60°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Locking door model available*



Stainless



Overlay

2115WC **2000 SERIES**
FEATURES

- Wine bottle capacity up to 24 bottles (.75L)
- Touch glass digital control featuring easy view command center
- Solid beech wood trimmed, full extension black vinyl coated wine racks
- Digitally controlled triple temperature zones
- Temperature range 40 to 60°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door



Stainless



Overlay

3018WC **MODULAR 3000 SERIES**
FEATURES

- Wine bottle capacity up to 31 bottles (.75L)
- Black interior with LED theater lighting
- Solid beech wood, graphite finished, full-extension black vinyl coated wine racks
- Digitally controlled single-zone convection cooling system
- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Temperature setting from 38 to 65°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable toe-kick - front to back and up and down
- Front adjustable rear leveling legs




Stainless




Overlay

3036WCWC **MODULAR 3000 SERIES**
FEATURES

- Wine bottle capacity up to 62 bottles (.75L)
- Black interior with LED theater lighting
- Solid beech wood, graphite finished, full-extension black vinyl coated wine racks
- Digitally controlled dual-zone convection cooling system
- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Temperature setting from 38 to 65°F
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable toe-kick - front to back and up and down
- Front adjustable rear leveling legs




Triple Zone System featured in 1075WC, 1115WC, 1175WC, and 2115WC




Dual Zone System featured in 2275ZWC



Single Zone Convection Cooling System featured in 2175WCC



Single Zone Convection Cooling System featured in 3018WC



Dual Zone System featured in 3036WCWC

*Locking door model must be ordered right-hand or left-hand hinge specific.

**When installing a black model, allow for 145° door swing to ensure wine racks slide out.

Refreshingly Cool.


The U-Line Beverage center is the perfect accompaniment to any room. Making entertaining easier and life more enjoyable while putting convenience within arm's reach.

Designed to accommodate a variety of different sizes and types of beverages, our Beverage Centers can hold up to 16 bottles of wine and more than 124 twelve ounce cans.

Our double temperature zone system, in the 1000 Series lets you set the low temperature between 34 and 39 degrees in the bottom half of the unit while the system regulates the top temperature about six degrees warmer. This is perfect for keeping beers and sodas in the bottom half refreshingly cold, while not over chilling the wines stored in the racks. The 3036BVWC has two independently adjustable temperature zones.



U-Line 1175BEV Beverage Center



Double Zone Sytem featured in 1075BEV and 1175BEV



Dual Zone System featured in 3036BVWC

	1075BEV	1175BEV	3036BVWC
Series Number / Width	1000 Series / 24"	1000 Series / 24"	3000 Series / 36"
Wine Bottle Capacity (.75L)	16	16	31
Overall Capacity (Cu. Ft.)	5.6	5.6	7.1
Available Finishes	Stainless	Stainless	Stainless, Overlay
Door Swing Options	Reversible	Reversible	N/A
Stainless Door Type	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Full stainless wrap door
Wine Rack Details	Black powder coated, 3/4 extension racks	Black powder coated, 3/4 extension racks	Black vinyl coated, full extension racks
Tempered Glass Shelves	2	2	4
Temperature Management System	Mechanically controlled double-zone	Digitally controlled double-zone	Independently digitally controlled dual-zone
Temperature Range	34 to 45°F	34 to 45°F	38 to 65°F - Wine Captain® Model Side 34 to 70°F - Beverage Center Side
Controls Type	Mechanical dial	Touch pad digital	U-Select™ Control
Sabbath / Blackout Mode	N/A	●	●
Toe Kick Accepts Overlay/Adjustable	N/A	N/A	Yes/Adjustable
UL Listing	Residential	Residential / Commercial	Residential

*Optional locking door must be ordered right-hand or left-hand hinge specific



Stainless

1075BEV*

1000 SERIES

- Two solid beech wood-trimmed, 3/4 extension black powder coated wine racks
- Unit capacity examples: up to 16 wine bottles, 48 – 12 oz beer bottles and 65 – 12 oz cans
- Lighted white interior
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Locking door model available in left or right hand door hinge



Stainless

1175BEV*

1000 SERIES

- Two solid beech wood-trimmed, 3/4 extension black powder coated wine racks
- Unit capacity examples: up to 16 wine bottles, 48 – 12 oz beer bottles and 65 – 12 oz cans
- Lighted black interior
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Locking door model available in left or right hand door hinge



Stainless



Overlay

3036BVWC

MODULAR 3000 SERIES

- Wine bottle capacity up to 31 bottles (.75L)
- Black interior with LED theater lighting
- Solid beech wood, graphite finished, full-extension black vinyl coated wine racks
- Digitally controlled dual-zone convection cooling system
- Refrigeration capacity of 3.6 cubic feet
- Bottle/can capacities: 60 12-oz bottles or 127 12-oz cans
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable toe-kick - front to back and up and down
- Front adjustable rear leveling legs

Efficiency in a Glass Door Refrigerator.

With a variety of shelving capabilities, from tempered glass or chrome plated heavy-duty wire shelves to supplemental beech wood trimmed wine racks, U-Line glass door refrigerators have the undercounter design and capacity for your food and beverage storage needs.

The LowE coated, argon gas filled thermopane glass door helps preserve food and beverages by blocking out potentially harmful UV rays and keeps cold air in with optimal insulation. Due to our new convection cooling system, air fully circulates throughout the interior and keeps the temperature at the desired set point.

U-Line offers the largest selection of ENERGY STAR® efficient undercounter refrigerators.










U-Line 2175RCG Glass Door Refrigerator



Several U-Line undercounter glass door refrigerators are ENERGY STAR® qualified and CEE Tier I rated



The U-Line undercounter glass door refrigerator 2175RCG was awarded Best of Year by Interior Design magazine

					
	2175RCG	2175BEVC	ADA24RGL	3018RGL	3036RRGL
Series Number / Width	2000 Series / 24"	2000 Series / 24"	ADA Series / 24"	3000 Series / 18"	3000 Series / 36"
Overall Capacity (Cu. Ft.)	5.4	5.6	5.3	3.6	7.1
Available Finishes	Stainless, Overlay	Stainless, Overlay	Stainless, Black	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Stainless or Overlay: Reversible	Stainless or Overlay: Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless and Overlay: Left or Right Hinged	N/A
Stainless Door Type	Full stainless wrap	Full stainless wrap, Overlay, Solid Door Overlay	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap
Wine Bottle Capacity (.75L)	N/A	16	N/A	N/A	N/A
Shelves	3 - tempered glass	2 - tempered glass	4 - heavy duty chrome wire	4 - tempered glass	8 - tempered glass
Crisper Drawer	1	N/A	N/A	1	2
Temperature Management System	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Independently digitally controlled dual-zone
Temperature Range	34 to 45°F	34 to 45°F	34 to 45°F	34 to 70°F	34 to 70°F
Controls Type	Touch glass digital	Touch glass digital	Touch pad digital	U-Select™ Control	U-Select™ Control
Sabbath / Blackout Mode					
Toe Kick Accepts Overlay/Adjustable	Yes/No	Yes/No	N/A	Yes/Adjustable	Yes/Adjustable
ENERGY STAR® / CEE Rating	ENERGY STAR® / Tier I	ENERGY STAR® / Tier I	ENERGY STAR® / Tier I		
UL Listing	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential	Residential

For Solid Door Refrigerator models see page 19



MODULAR 3000 SERIES – Adjustment and configuration of shelves allows for storing taller items



MODULAR 3000 SERIES – U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of the door



2175RCG 2000 SERIES

FEATURES

- Touch glass digital control featuring easy view command center
- Three tempered glass shelves
- Refrigeration capacity of 5.4 cubic feet
- Dual-lighted black interior
- Digitally controlled convection cooling system
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- ENERGY STAR® AND CEE Tier I rated



ADA24RGL ADA SERIES

FEATURES

- Digitally controlled convection cooling system
- 4 full depth, removable, chrome plated heavy duty wire shelves
- Refrigeration capacity of 5.3 cubic feet
- Storage for more than 7-1/2 cases of 12 oz beverages
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Door lock standard on all models
- ENERGY STAR® and CEE Tier I rated



2175BEVC 2000 SERIES

FEATURES

- Two solid beech wood-trimmed, full extension black vinyl coated wine racks
- Unit capacity examples: up to 16 wine bottles, 48 – 12 oz beer bottles and 65 – 12 oz cans
- Lighted black interior
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Solid door overlay model available
- Approved for supplemental refrigeration of meat and dairy products
- ENERGY STAR® and CEE Tier I rated



ALL GLASS DOOR REFRIGERATORS –
The convection cooling system fully circulates air through the interior and keeps the temperature at the desired set point



Single Zone Convection Cooling System featured in 2175RCG, 2175BEVC and ADA24RGL



3018RGL MODULAR 3000 SERIES

FEATURES

- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Digitally controlled convection cooling system
- Refrigeration capacity of 3.6 cubic feet
- Three adjustable tempered glass shelves with 11 positions
- Capacities: 60 12-oz bottles or 127 12-oz cans
- Black interior with LED theater lighting
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable toe-kick - front to back and up and down
- Front adjustable rear leveling legs



MODULAR 3000 SERIES –
Adjustable tempered glass shelves with 11 adjustment positions



Single Zone Convection Cooling System featured in 3018RGL




3036RRGL MODULAR 3000 SERIES

FEATURES

- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Digitally controlled dual-zone convection cooling system
- Refrigeration capacity of 7.1 cubic feet
- Six adjustable tempered glass shelves with 11 positions
- Capacities: 120 12-oz bottles or 254 12-oz cans
- Black interior with LED theater lighting
- Standard commercial stainless steel handle is interchangeable with professional handle option
- LowE coated, argon gas filled thermopane glass door
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable toe-kick - front to back and up and down
- Front adjustable rear leveling legs




MODULAR 3000 SERIES –
Fully adjustable LED theater lit black interior



Dual Zone System featured in 3036RRGL

Efficient Undercounter Convenience.

Undercounter refrigerators are the ultimate in convenience. Place a refrigerator wherever it's needed: next to a food prep area, your child's playroom, in your bar or home gym – even in your bathroom to keep cosmetics and medications cool. Featuring the widest selection of refrigerators, U-Line offers the most usable refrigeration capacity, bright and open interiors, flexible shelf locations and generous in-door storage. Committed to environmental sustainability, U-Line offers the largest selection of ENERGY STAR® efficient undercounter refrigerators.

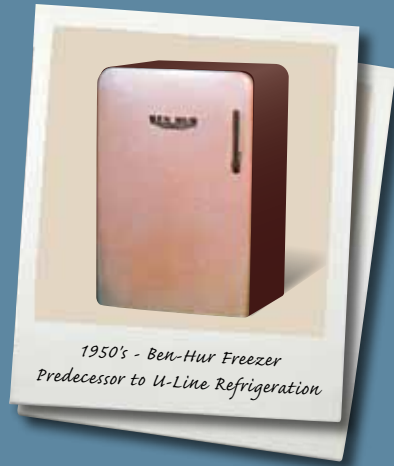










1950's - Ben-Hur Freezer
Predecessor to U-Line Refrigeration



U-Line 3036RR Dual Zone Modular Refrigerator



MODULAR 3000 SERIES – Lower drawer bins fit 2 one-gallon containers with additional space for more storage

									
	29R	1115R	1175R	2115R	2175RC	2275DWRC	ADA24R	3018RF	3036RR
Series Number / Width	ADA Series / 21"	1000 Series / 15"	1000 Series / 24"	2000 Series / 15"	2000 Series / 24"	2000 Series / 24"	ADA Series / 24"	3000 Series / 18"	3000 Series / 36"
Overall Capacity (Cu. Ft.)	3.3	3.0	5.3	3.0	5.2	5.3	5.3	3.4	6.8
Available Finishes	Black, White	Stainless, Black	Stainless, Black, White	Stainless, Black, White, Overlay	Stainless, Black, White, Overlay	Stainless, Black, Overlay	Stainless, Black	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Drawer	Stainless: Left or Right Hinged Black: Reversible	Stainless and Overlay: Left or Right Hinged	N/A
Stainless Door Type	N/A	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap	Full stainless wrap	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap
Storage Bins	3/In door	2/In door	2/In door	2/In door	2/In door	1	N/A	3	6
Shelves	3 - tempered glass	3 - tempered glass	3 - tempered glass	3 - tempered glass	3 - tempered glass	N/A	4 - heavy duty chrome wire	N/A	N/A
Temperature Management System	Mechanically controlled passive cooling	Digitally controlled passive cooling	Digitally controlled passive cooling	Digitally controlled passive cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Independently digitally controlled dual-zone
Temperature Range	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 70°F	34 to 70°F
Controls Type	Mechanical dial	Touch pad digital	Touch pad digital	Touch glass digital	Touch glass digital	Touch glass digital	Touch pad digital	U-Select™ Control	U-Select™ Control
Sabbath / Blackout Mode	N/A	●	●	●	●	●	●	●	●
Toe Kick Accepts Overlay/Adjustable	N/A	N/A	N/A	Yes/No	Yes/No	Yes/No	N/A	Yes/Adjustable	Yes/Adjustable
ENERGY STAR® / CEE Rating	ENERGY STAR® / Tier 1		ENERGY STAR® / Tier 3	ENERGY STAR® / Tier 1	ENERGY STAR® / Tier 3	ENERGY STAR® / Tier 2	ENERGY STAR® / Tier 3	ENERGY STAR® / Tier 3	
UL Listing	Residential	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential	Residential

For outdoor refrigerator models see page 31



MODULAR 3000 SERIES – The right products at the right place at the right temperature, modular refrigeration allows for custom settings



The U-Line 1175R, 2175RC, ADA24R and 3018RF refrigerators are ENERGY STAR® qualified and CEE Tier 3 rated

**29R****ADA SERIES****FEATURES**

- Mechanical dial control
- Mechanically controlled passive cooling system
- Refrigeration capacity of 3.3 cubic feet
- Non-lock models will accept a 1/4" insert panel
- Can be ordered with an optional lock
- ENERGY STAR® and CEE Tier 1 rated
- ADA height compliant



Black White

**1175R****1000 SERIES****FEATURES**

- Touch pad digital control featuring easy view command center
- Digitally controlled passive cooling system
- Refrigeration capacity of 5.3 cubic feet
- Black and white models will accept a 1/4" insert panel
- All models can be ordered with a lock
- Stainless model with lock must be ordered right-hand or left-hand hinge specific
- Lighted white interior
- Standard commercial stainless steel handle is interchangeable with professional handle option
- ENERGY STAR® and CEE Tier 3 rated



Stainless Black White

**1115R****1000 SERIES****FEATURES**

- Touch pad digital control featuring easy view command center
- Digitally controlled passive cooling system
- Refrigeration capacity of 3.0 cubic feet
- Black model will accept a 1/4" insert panel
- Lighted white interior
- Standard commercial stainless steel handle is interchangeable with professional handle option



Stainless Black

**2115R****2000 SERIES****FEATURES**

- Touch glass digital control featuring easy view command center
- Digitally controlled passive cooling system
- Refrigeration capacity of 3.0 cubic feet
- Optional full overlay panel on black and white models with purchase of overlay kit
- Lighted white interior
- Standard commercial stainless steel handle is interchangeable with professional handle option
- ENERGY STAR® and CEE Tier 1 rated




Stainless Black White Overlay

**2175RC****2000 SERIES****FEATURES**

- Touch glass digital control featuring easy view command center
- Digitally controlled convection cooling system
- Refrigeration capacity of 5.2 cubic feet
- Optional full overlay panel on black and white models with purchase of overlay kit
- Lighted white interior
- Standard commercial stainless steel handle is interchangeable with professional handle option
- ENERGY STAR® and CEE Tier 3 rated



Stainless Black White Overlay



Single Zone Passive Cooling System
featured in 29R, 1115R, 1175R, 2115R

**ADA24R****ADA SERIES****FEATURES**

- Digitally controlled convection cooling system
- Refrigeration capacity of 5.3 cubic feet
- Storage for more than 7-1/2 cases of 12 oz beverages
- Solid black door is field reversible and will accept a 1/4" insert panel
- Door lock standard on all models
- LowE coated, argon gas filled thermopane glass door
- 4 full depth, removable, chrome plated heavy duty wire shelves
- Standard commercial stainless steel handle is interchangeable with professional handle option
- ENERGY STAR® and CEE Tier 3 rated
- ADA height compliant




Stainless Black

**2275DWRC****2000 SERIES****FEATURES**

- Touch glass digital control with easy view command center
- Digitally controlled convection cooling system
- Refrigeration capacity of 5.3 cubic feet
- Stainless steel drawer construction
- Overlay can be converted to a black model with purchase of a black handle kit
- Top bin organizer and crisper drawer included
- Optional slide & divide organizing system (Must be ordered separately)
- Lighted interior
- ENERGY STAR® and CEE Tier 2 rated



Stainless Black Overlay



Single Zone Convection Cooling System featured in 2175RC, 2275DWRC, ADA24R and 3018RF (3018RF has a range of 34-70°)

**3018RF****MODULAR 3000 SERIES****FEATURES**

- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Digitally controlled convection cooling system
- Refrigeration capacity of 3.4 cubic feet
- Three full-extension, slide-out drawer bins
- Lower drawer bins fit one-gallon containers and two-liter bottles with additional space for more storage
- All drawer bins are removable for easy cleaning
- Black interior with LED theater lighting
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Front adjustable rear leveling legs
- ENERGY STAR® and CEE Tier 3 rated




Stainless Overlay

**3036RR****MODULAR 3000 SERIES****FEATURES**

- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Digitally controlled convection cooling system
- Refrigeration capacity of 6.8 cubic feet
- Lower drawer bins fit one-gallon containers and two-liter bottles with additional space for more storage
- All drawer bins are removable for easy cleaning
- Black interior with LED theater lighting
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Front adjustable rear leveling legs



Stainless Overlay




Dual Zone System featured in 3036RR

Compact and Convenient.

When Henry Uihlein founded U-Line Corporation in 1962 as an outgrowth of Ben-Hur Freezer Company, the initial product manufactured was the industry's first undercounter ice maker. Today, the U-Line crescent ice maker continues to be the leader in its class, using less than 3 gallons of water to produce up to 25 pounds of ice daily – a rate that is approximately four times greater than what the average household refrigerator can produce.

The U-Line undercounter crescent ice maker allows for easy, convenient and inexpensive installation. In addition, while all models are compact and convenient, the BI95, BI98 and ADA15IM ice maker models also meet the ADA height compliant requirements.

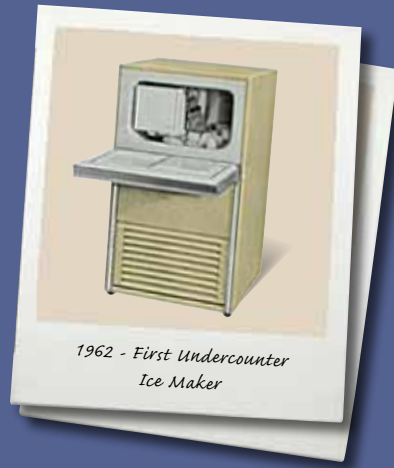

1962 - First Undercounter Ice Maker



U-Line BI2115 Ice Maker



ALL ICE MAKERS – No ice shortages here - produces up to 25 pounds of crescent ice (1/2" W x 3/4" H 2-1/2" L) per day with no drain required

	BI95	BI98	ADA15IM	BI2115
Series Number / Width	ADA Series / 14"	ADA Series / 15"	ADA Series / 15"	2000 Series / 15"
Maximum Daily Ice Production / Storage (lbs)	23 / 12	25 / 25	25 / 25	25 / 25
Ice Cube Type	Crescent	Crescent	Crescent	Crescent
Available Finishes / Door Type	Black / White with integrated handle	Black / White with integrated handle	Black, stainless wrap with black end caps	Black, White, Overlay or full stainless wrap
Door Swing Options	Reversible	Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Black / White: Reversible
Controls Type	Mechanical dial	Mechanical dial	Mechanical dial	Mechanical dial
Defrost Technology	Manual	Manual	Manual	Manual
Toe Kick Accepts Overlay	N/A	N/A	N/A	Yes
UL Listing	Residential	Residential	Residential/ Commercial	Residential/ Commercial

For outdoor ice maker and ice machine models see page 25



BI95 ADA SERIES

- Daily ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Uses under 3 gallons of water to produce 25 lbs of ice
- All black and white models will accept a 1/4" insert panel
- ADA height compliant



BI98 ADA SERIES

- Daily ice rate – up to 25 lbs
- Ice storage capacity – up to 25 lbs
- Uses under 3 gallons of water to produce 25 lbs of ice
- All black and white models will accept a 1/4" insert panel
- ADA height compliant



ADA15IM ADA SERIES

- Daily ice rate – up to 25 lbs
- Ice storage capacity – up to 25 lbs
- Uses under 3 gallons of water to produce 25 lbs of ice
- Black model will accept a 1/4" insert panel
- Standard commercial stainless steel handle is interchangeable with professional handle option
- ADA height compliant



BI2115 2000 SERIES

- Daily ice rate – up to 25 lbs
- Ice storage capacity – up to 25 lbs
- Uses under 3 gallons of water to produce 25 lbs of ice
- Optional full overlay panel on black and white models with purchase of overlay kit
- Standard commercial stainless steel handle is interchangeable with professional handle option

Commercial Performance with Residential Style.

Continuing to combine superior performance with stylish design, U-Line enlisted America's No. 1 selling commercial ice machine company to co-develop the residential CLR2160 clear ice machine. The CLR2160 boasts up to 60 pounds of commercial quality clear ice cubes daily.

All clear ice machines require a drain. For those applications that do not have access to a gravity assisted drain, the CLR2160 can be ordered with the sealed and permanently lubricated P60 drain pump installed. All units ship with a drain line kit to ensure proper installation and optimal performance.

Our patented clear ice making process provides the perfect balance of high ice production, quiet operation and easy cleaning process.



U-Line CLR2160 Clear Ice Machine



CLR2160 – The CLR2160 is the easiest clear ice machine to clean with an indicator alert lets you know when to clean the unit.- the cleaning process takes less than 45 minutes and allows you to immediately enjoy the first batch of ice

	CLR2160
Series Number / Width	2000 Series / 15"
Maximum Daily Ice Production / Storage (lbs)	60 / 30
Ice Cube Type	Clear
Available Finishes / Door Type	Black, White, Overlay or full stainless wrap
Door Swing	<i>Stainless:</i> Left or Right Hinged <i>Black / White:</i> Reversible
Drain Required	Yes
Controls Type	Touch glass digital
Sabbath / Blackout Mode	
Defrost Technology	Frost-Free
Toe Kick Accepts Overlay	Yes
UL Listing	Residential



Stainless Black White Overlay

CLR2160

2000 SERIES

- **Drain required**, drain line kit included to ensure proper installation
- Lighted white interior
- Clean indicator alert
- Silence mode – temporarily suspends ice making for three hours
- Heavy duty ice scoop included
- Standard commercial stainless steel handle is interchangeable with professional handle
- Order unit with or without factory installed P60 drain pump



Customize clear ice cube density with a single touch for varying user preferences



Produces 32 clear ice cubes per cycle (7/8" W x 7/8" H x 7/8" L)




For outdoor clear ice machine see page 30

The Ideal Combination of Functionality and Convenience.

U-Line's disciplined focus on the undercounter category has enabled us to design and engineer leading appliances that offer the highest quality, premium styling and superior features. Revolutionizing this category in versatility and convenience, U-Line combines refrigeration and ice making into a single unit.



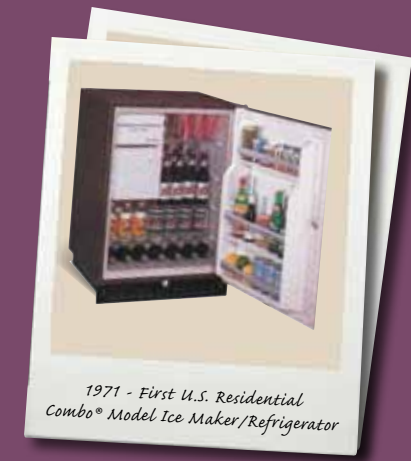




With varying sizes and configurations, such as the CLRCO2I75, a U-Line industry exclusive clear ice machine with refrigerator, a Refrigerator / Freezer model, or the Combo® Drawer model with refrigerator space, an ice maker and a freezer, there is sure to be a model to fit your needs.



U-Line CLRCO2I75 Combo® Model



COMBO® MODELS – The Combo® Models bring together abundant ice supply with generous refrigeration capacity in the convenience of one unit

							
	CO29*	CO29F*	CO1175**	CO2175F	2175RF	CLRCO2175	C2275DWR
Series Number / Width	ADA Series / 21"	ADA Series / 21"	1000 Series / 24"	2000 Series / 24"	2000 Series / 24"	2000 Series / 24"	2000 Series / 24"
Refrigerator / Freezer Capacity (Cu. Ft)	2.1	2.1	4.2	4.2	4.2 / 1.5	2.5	3.0 / 2.0
Maximum Daily Ice Production / Storage (lbs)	18 / 13	8 / 13	18 / 13	8 / 13	N/A	40 / 15	6 / 10
Ice Cube Type	Crescent	Crescent	Crescent	Crescent	N/A	Clear	Crescent
Available Finishes	Black	Black, White	Stainless, Black	Stainless, Black, White, Overlay	Stainless, Black, White, Overlay	Stainless, Black, Overlay	Stainless, Black, Overlay
Door Swing Options	Reversible	Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Other: Reversible	Stainless: Left or Right Hinged Other: Reversible	Stainless: Left or Right Hinged Other: Reversible	Drawer
Stainless Door Type	N/A	N/A	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap	Full stainless wrap	Full stainless wrap
In-Door Storage Bins	2	2	2	2	2	2	N/A
Tempered Glass Shelves	2	2	3	3	3	3	N/A
Crisper Drawer	N/A	N/A	N/A	●	●	N/A	N/A
Temperature Management System	Mechanically controlled passive cooling	Mechanically controlled convection cooling	Mechanically controlled passive cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled passive cooling	Digitally controlled convection cooling
Temperature Range	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F
Controls Type	Mechanical dial	Mechanical dial	Mechanical dial	Touch glass digital	Touch glass digital	Touch glass digital	Touch glass digital
Defrost Technology	Manual	Frost-Free	Manual	Frost-Free	Frost-Free	Frost-Free	Frost-Free
Sabbath / Blackout Mode	N/A	N/A	N/A	●	●	●	●
Toe Kick Accepts Overlay	N/A	N/A	N/A	Yes	Yes	Yes	Yes
UL Listing	Residential / Commercial	Residential	Residential	Residential	Residential	Residential	Residential

*When installing a left-hand hinge CO29 or CO29F, allow for 145° door swing for proper removal of ice bin

**When installing a left-hand hinge CO1175, allow for 125° door swing for proper removal of ice bin



Black

CO29

ADA SERIES

FEATURES

- Mechanical dial control
- Mechanically controlled passive cooling system
- Daily crescent ice rate – up to 18 lbs
- Ice storage capacity – 13 lbs
- Refrigeration capacity of 2.1 cubic feet
- Black model will accept a 1/4" insert panel
- Manual defrost
- No drain required
- ADA height compliant
- When installing a left-hand hinge model, allow for 145° door swing for proper removal of ice bin



Black White

CO29F

ADA SERIES

FEATURES

- Mechanical dial control
- Mechanically controlled convection cooling system
- Daily crescent ice rate – up to 8 lbs
- Ice storage capacity – 13 lbs
- Refrigeration capacity of 2.1 cubic feet
- Black model will accept a 1/4" insert panel
- Patented frost-free technology
- No drain required
- ADA height compliant
- When installing a left-hand hinge model, allow for 145° door swing for proper removal of ice bin



Stainless Black

CO1175

1000 SERIES

FEATURES

- Mechanical dial control
- Mechanically controlled passive cooling system
- Daily crescent ice rate – up to 18 lbs
- Ice storage capacity – 13 lbs
- Refrigeration capacity of 4.2 cubic feet
- Black model will accept a 1/4" insert panel
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Manual defrost
- No drain required
- When installing a left-hand hinge model, allow for 125° door swing for proper removal of ice bin



Stainless Black White Overlay

CO2175F

2000 SERIES

FEATURES

- Touch glass digital control featuring easy view command center
- Digitally controlled convection cooling system
- Daily crescent ice rate – up to 8 lbs
- Ice storage capacity – up to 13 lbs
- Refrigeration capacity of 4.2 cubic feet
- Optional full overlay panel on black and white models with purchase of overlay kit
- Crisper drawer included
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Lighted white interior
- Patented frost-free technology
- No drain required



Stainless Black White Overlay

2175RF

2000 SERIES

FEATURES

- Touch glass digital control featuring easy view command center
- Digitally controlled convection cooling system
- Refrigeration capacity of 4.2 cubic feet
- Freezer capacity of 1.5 cubic feet
- Freezer temperature: 0 to 5°F
- Optional full overlay panel on black and white models with purchase of overlay kit
- Crisper drawer included
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Lighted white interior
- Patented frost-free technology



Stainless Black Overlay

CLRCO2175

2000 SERIES

FEATURES

- Touch glass digital control featuring easy view command center
- Digitally controlled passive cooling system
- Daily clear ice rate – up to 40 lbs
- Ice storage capacity – up to 15 lbs
- Refrigeration capacity of 2.5 cubic feet
- Optional full overlay panel on black model with purchase of overlay kit
- Standard commercial stainless steel handle is interchangeable with professional handle option
- Lighted white interior
- Frost-free
- Order unit with our without factory installed P60 drain pump
- **Drain required**, drain line kit included to ensure proper installation




Stainless Black Overlay

C2275DWR


2000 SERIES

FEATURES

- Touch glass digital control with easy view command center
- Digitally controlled convection cooling system
- Daily crescent ice rate – up to 6 lbs
- Ice storage capacity – up to 10 lbs
- Refrigeration capacity of 3.0 cubic feet
- Freezer capacity of 2.0 cubic feet
- Freezer temperature: 0 to 5°F
- Overlay can be converted to a black model with purchase of a black handle kit
- Optional slide and divide organizing system must be ordered separately
- Lighted interior
- Frost-free
- No drain required



Single Zone Passive Cooling System featured in CO29 and CO1175



Single Zone Convection Cooling System featured in CO2175, 2175RF, CLRCO2175 and C2275DWR

**C2275DWR** – Combo® Model drawer delivers three appliances in one - top drawer holds up to 3 cubic feet of refrigerator space with clear top sliding bin while lower drawer houses both ice maker and freezer**CLRCO2175** – Unmatched Innovation – the only unit available offering both refrigeration and clear ice capabilities combined in one single unit

Elegant Convenience. Rugged Enough for the Outdoors.

Today's entertaining environments extend far beyond the boundaries of the traditional home. For nearly 50 years, U-Line products have been used in outdoor applications and continue to be some of our most popular models. Our outdoor models are fully wrapped in stainless steel to protect from harsh outdoor elements. These units are UL (Underwriters Laboratory) rated and deemed suitable for outdoor usage and come with a specific outdoor warranty.



U-Line 2175RSOD Outdoor Refrigerator

CLR2I60SOD

Daily Ice Production Rates:

Air / Water Temperature	Daily Ice Production
70°F / 50°F	60 lbs of ice
80°F / 50°F	55 lbs of ice
90°F / 70°F	51 lbs of ice
100°F / 70°F	44 lbs of ice



Durable outdoor units come fully wrapped in stainless with a 1-1/4" diameter professional handle - refrigerators come standard with a door lock

	2I15RSOD	2I75RSOD	BI2I15SOD	CLR2I60SOD
Series Number / Width	Outdoor Series / 15"	Outdoor Series / 24"	Outdoor Series / 15"	Outdoor Series / 15"
Overall Capacity (Cu. Ft.)	3.0	5.4		
Maximum Daily Ice Production / Storage	N/A	N/A	25 / 25	60 / 30
Ice Cube Type	N/A	N/A	Crescent	Clear
Available Finishes	Stainless door and cabinet	Stainless door and cabinet	Stainless door and cabinet	Stainless door and cabinet
Door Type / Swing Options	Full stainless wrap / left or right hinged	Full stainless wrap / left or right hinged	Full stainless wrap / left or right hinged	Full stainless wrap / left or right hinged
Shelves	3 - tempered glass	3 - tempered glass		
Crisper Drawer	N/A	●	N/A	N/A
Temperature Management System	Digitally controlled passive cooling	Digitally controlled passive cooling		
Temperature Range	34 to 45°F	34 to 45°F		
Controls Type	Touch glass digital	Touch glass digital	Mechanical dial	Touch glass digital
Sabbath / Blackout Mode	●	●	N/A	●
Defrost Technology	Automatic	Automatic	Manual	Frost-Free
Drain Required	N/A	N/A	Not Required	●
ENERGY STAR® / CEE Rating	ENERGY STAR® / Tier 1	ENERGY STAR® / Tier 3		
UL Listing	Residential / Commercial / Outdoor	Residential / Commercial / Outdoor	Residential / Outdoor	Residential / Outdoor



2I15RSOD OUTDOOR SERIES

- Standard door lock
- Standard professional stainless steel handle is interchangeable with commercial handle option
- Lighted white interior
- ENERGY STAR® and CEE Tier 1 rated



2I75RSOD OUTDOOR SERIES

- Standard door lock
- Standard professional stainless steel handle is interchangeable with commercial handle option
- Lighted white interior
- ENERGY STAR® and CEE Tier 3 rated



BI2I15SOD OUTDOOR SERIES

- Daily crescent ice rate – up to 25 lbs
- Storage capacity – up to 25 lbs
- Uses under 3 gallons of water to produce 25 lbs of ice
- Standard professional stainless steel handle is interchangeable with commercial handle option
- No drain required



CLR2I60SOD OUTDOOR SERIES

- Daily clear ice rate – up to 60 lbs
- Storage capacity – up to 30 lbs
- Standard professional stainless steel handle is interchangeable with commercial handle option
- Clean Indicator Alert
- Order unit with or without factory installed P60 drain pump
- **Drain required**, drain line kit included to ensure proper installation

Hard Working.
Easy Access.

U-Line products have been used in commercial settings for years. Our undercounter units are perfect for stadiums, hotel rooms, day spas, boutique restaurants, board rooms and much more.

The luxurious Elysian Hotel Chicago, rated one of the finer hotels in America, has elegantly integrated U-Line products in each of the suites' private bar area. Many other commercial projects from hotels in Las Vegas such as the Wynn, Mirage and CityCenter to sporting event venues across the United States such as the Louisiana Superdome, Gillette Stadium and Soldier Field, use U-Line undercounter models to outfit suites and luxury boxes.

The chart to the right shows the U-Line models that are UL (Underwriters Laboratory) Commercial Listed.



U-Line 2175BEVC Glass Door Refrigerator and CLR2160 Clear Ice Machine

Series	Product Category	Model	Description	Page
1000 Series	WINE CAPTAIN® MODELS	1115WC	15" Wine Captain® Model	10
		1175WC	24" Wine Captain® Model	10
2000 Series		2115WC	15" Wine Captain® Model	10
		2175WCC	24" Wine Captain® Model, Convection	11
1000 Series	BEVERAGE CENTERS	1175BEV	24" Beverage Center	13
2000 Series	GLASS DOOR REFRIGERATORS	2175BEVC	24" Glass Door Refrigerator, Convection	16
1000 Series	REFRIGERATORS	1115R	15" Refrigerator	20
		1175R	24" Refrigerator	20
2000 Series		2115R	15" Refrigerator	20
		2175RC	24" Refrigerator, Convection	20
		2275DWRC	24" Drawer Refrigerator, Convection	21
ADA Series		ADA24R	24" ADA Refrigerator	21
	ICE MAKERS	BI2115	15" Crescent Ice Maker	23
		ADA15IM	15" ADA Crescent Ice Maker	23
	COMBO® MODEL	CO29	21" Combo® Model	28
Outdoor Series	OUTDOOR	2115RSOD	15" Outdoor Refrigerator	31
		2175RSOD	24" Outdoor Refrigerator	31
Marine/RV Series	MARINE / RV	CO29	21" Combo® Model	39
		75F	24" Freezer	39



U-Line ADA24R Refrigerator

Series	Product Category	Model	Description	Page
ADA Series	REFRIGERATORS	ADA24RGL	24" ADA Refrigerator; Convection, Glass Door	16
		29R	21" Refrigerator	20
		ADA24R	24" ADA Refrigerator; Convection	21
ADA Series	ICE MAKERS	BI95	14" Crescent Ice Maker	23
		BI98	15" Crescent Ice Maker	23
		ADA15IM	15" ADA Ice Maker	23
ADA Series	COMBO® MODELS	CO29	21" Combo® Model	28
ADA Series	COMBO® MODELS	CO29F	21" Combo® Model, Convection, Frost-Free	28
		CO29	21" Combo® Model	39

The Right Fit
for Your Needs.

Building on nearly 50 years of ADA height compliant products, U-Line's very first innovation, the BI95 ice maker, met the ADA height requirement even before there was a standard. We continue to develop an ever-expanding lineup of ADA specific models as the need for universal design continues to grow.

ADA models are the perfect fit for small workspaces, apartments and assisted living areas. These versatile units can be built-in or stand alone, making them convenient and easily accessible. No additional venting or spacing is needed. Medical centers such as Children's Hospital in Denver and UCSD Medical Center in San Diego utilize the 29R refrigerator because of their compact convenience and performance.

Our newest models include the ADA24R refrigerator, available with a solid or glass door and the new 32 inch tall ADA15IM ice maker, capable of producing up to 25 pounds of crescent ice daily with 25 pounds of ice storage.

The chart to the left lists all U-Line ADA height compliant units, meeting the requirement of fitting underneath a 34 inch countertop.

The Ultimate in Efficiency.

U-Line excels with energy efficient appliances. Most of our refrigerators meet, and in many cases exceed, the current ENERGY STAR® standards. With more than 40 SKUs of ENERGY STAR® efficient products, U-Line has the largest undercounter offering in the industry.

To receive an ENERGY STAR® rating, a refrigerator must operate 20% more efficiently than the Federal standard. The CEE (Consortium for Energy Efficiency) promotes super efficient refrigerators that use significantly less electricity than the Federal standard.

The U-Line refrigerator models 1175R, 2175RC, ADA24R, 3018RF and 2175RSOD have received both the ENERGY STAR® and the highest CEE Tier 3 rating of 30% more efficient than the Federal standard.

With our new convection system our 2175BEVC Glass Door Refrigerator is ENERGY STAR® and CEE Tier 1 rated. U-Line is the first to receive an ENERGY STAR® rating for this type of appliances.



U-Line 3018RF modular Refrigerator is ENERGY STAR® and CEE Tier 3 rated.



Energy efficiency is a priority at U-Line. We continue to work on minimizing our carbon footprint by recycling and reusing plastics, shipping containers, mixed metals, cardboard, paper, hydraulic oil, batteries, bulbs and refrigerants at our factory

Product Category	Model	Description	ENERGY STAR®	CEE Tier 1	CEE Tier 2	CEE Tier 3	Page
GLASS DOOR REFRIGERATORS	2175BEVC	24" Beverage Center, Convection	●	●			16
	2175RCG	24" Refrigerator, Convection, Glass Door	●	●			16
	ADA24RGL	24" ADA Refrigerator, Convection Glass Door	●	●			16
REFRIGERATORS	29R	21" Refrigerator	●	●			20
	1175R	24" Refrigerator	●	●	●	●	20
	2115R	15" Refrigerator	●	●			20
	2175RC	24" Refrigerator, Convection	●	●	●	●	20
	2275DWRC	24" Drawer Refrigerator, Convection	●	●	●		21
	ADA24R	24" ADA Refrigerator, Convection	●	●	●	●	21
OUTDOOR	3018RF	18" Modular Refrigerator	●	●	●	●	21
	2115RSOD	15" Outdoor Refrigerator	●	●			31
	2175RSOD	24" Outdoor Refrigerator	●	●	●	●	31

ENERGY STAR® is a joint program of the U.S. Environmental Protection Agency and the U.S. Department of Energy helping us all save money to protect the environment through energy efficient products and practices. The Consortium for Energy Efficiency (CEE) strives to heighten awareness and appreciation of super efficient appliances in the ENERGY STAR® spectrum. Many states recognize the CEE Tier system ratings and may offer additional rebates for purchases of super efficient appliances.



U-Line 2175BEVCS



Minimum of 20% better than DOE standards



U-Line 2275DWRC



Minimum of 25% better than DOE standards



U-Line 3018RF



Minimum of 30% better than DOE standards

Leisure
On Board.








Known for clean lines and understated elegance, U-Line takes ice making to yet another environment. Our Signature Marine line features durability and good looks, as well as exceptional ice production and refrigeration capacity, for use above and below deck. The corrosive-resistant, stainless steel hinges and fasteners on the durable and UV resistant cabinet and doors, combine maximum convenience with durability and good looks.



U-Line SS1095 Marine Ice Maker



The SS1095 produces up to 23 pounds of ice daily in a sleek corrosive resistant stainless steel package and offers three flange options

							
	SS1095	SS98	BI95BTP	WH95TP	SP18	C029	75F
Maximum Daily Ice Production / Storage (lbs)	23 / 12	25 / 23	23 / 12	23 / 12	23 / 12	18 / 13	N/A
Ice Cube Type	Crescent	Crescent	Crescent	Crescent	Crescent	Crescent	N/A
Refrigerator / Freezer Capacity (Cu.Ft.)	N/A	N/A	N/A	N/A	N/A	2.1	5.4
Available Finishes	Stainless	Stainless	Black	White	Black, White	Black, White	Black, White
Cabinet Outer Shell	Stainless steel	Stainless steel	Vinyl coated	Vinyl coated	Vinyl coated	Vinyl coated	Vinyl coated
Door Swing Options	Reversible	Reversible	Reversible	Reversible	Reversible	Reversible	Reversible
Travel Latch / Pin	Travel latch	Travel pin	Travel pin	Travel pin	Travel pin	Travel pin	
Panel Integration Options		1/4" insert	1/4" insert		1/4" insert black only	1/4" insert black only	1/4" insert
Mounting Flange	3 flange options		Flush to cabinet	Flush to cabinet	Flush to cabinet		
Marine Grade Hardware	Corrosion resistant	Corrosion resistant	Corrosion resistant	Corrosion resistant	Corrosion resistant	Corrosion resistant	
In-Door Storage Bins	N/A	N/A	N/A	N/A	N/A	2	2
Tempered Glass Shelves	N/A	N/A	N/A	N/A	N/A	2 - glass shelves	3 - glass shelves
Defrost Technology	Manual	Manual	Manual	Manual	Manual	Manual	Manual
220 Volt Model Available	●	●	●	●	●	●	●



SS1095

FEATURES

- All stainless models
- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Positive catch door latch
- Multiple flange options
- SS1095NF - no flange, can freestand
- SS1095FC - 1/2" mounting flange flush to cabinet
- SS1095FD - 1/2" mounting flange flush to door
- Field reversible door with zero clearance door swing
- No drain required
- SS1095NF - 24-3/4" H x 13-15/16" W x 17" D
- SS1095FC - 25-1/4" H x 15-1/16" W x 17" D*
- SS1095FD - 25-7/8" H x 15-15/16" W x 17" D*



Black

BI95BTP

FEATURES

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- 1/2" wide mounting flange
- Corrosion and UV resistant components
- Accepts 1/4" insert panel
- Travel pin included
- Field reversible door with zero clearance door swing
- No drain required
- 24-3/4" H x 13-15/16" W x 17" D
- 25-1/4" H x 15-1/16" W x 17" D*



Stainless

SS98

FEATURES

- Daily crescent ice rate – up to 25 lbs
- Ice storage capacity – up to 25 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- Field reversible door with zero clearance door swing
- Corrosion and UV resistant components
- Accepts 1/4" insert panel
- Travel pin included
- No drain required
- 27-3/8" H x 14-15/16" W x 20" D



White

WH95TP

FEATURES

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- 1/2" wide mounting flange
- Corrosion and UV resistant components
- Travel pin included
- Field reversible door with zero clearance door swing
- No drain required
- 24-3/4" H x 13-15/16" W x 17" D
- 25-1/4" H x 15-1/16" W x 17" D*



Black

White

SPI8

FEATURES

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- Field reversible door with zero clearance door swing
- Black model accepts 1/4" insert panel
- 1/2" wide mounting flange
- Corrosion and UV resistant components
- No drain required
- Travel pin included
- 18-1/2" H x 13-15/16" W x 24-13/16" D
- 18-7/8" H x 15-1/16" W x 24-13/16" D*



Black

White

75F

FEATURES

- Mechanical dial control
- Freezer capacity – 5.4 cubic feet
- Manual defrost
- Models will accept a 1/4" insert panel
- Optional door lock
- Three 4mm tempered glass shelves and two door bins
- UL Commercial listed only
- Freezer temperature: 0 to 5°F
- Field reversible door with zero clearance door swing
- 34-1/8" H x 23-15/16" W x 23-3/16" D



Black

White

CO29

FEATURES

- Daily crescent ice rate – up to 18 lbs
- Ice storage capacity – up to 13 lbs
- Mechanically controlled passive cooling system
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- Refrigeration capacity – 2.1 cubic feet
- Corrosion and UV resistant components
- Anodized aluminum door handle and frame on white model
- No drain required
- Travel pin included
- Black model accepts 1/4" insert panel
- 28-1/2" H x 20-13/16" W x 24" D

*These dimensions include the flange.

Integrating U-Line Product Into Cabinetry.

All U-Line 2000 and Modular 3000 Series models can be fully integrated into surrounding cabinetry with the application of overlay panels or frames. Full ¾" thick overlay panels apply to solid door and solid drawer models. Full ¾" overlay frames apply to glass door models. All 2000 and Modular 3000 Series models maintain zero clearance within the surrounding cabinetry ensuring performance and hinge clearance with the panel or frame installed, providing optimized full integration. The toe-kicks can also accept overlays.

The Modular 3000 Series models have an adjustable toe kick, allowing for height and depth modification to create that completely flush and integrated installation. The robust and concealed hinges with built-in door stops and adjustable doors and front adjustable rear leveling legs allow for fine tuning and alignment.

The images to the right are samples of various cabinetry styles and show fully integrated U-Line product. The chart on the adjacent page provides a quick-reference list of which U-Line models can be fully integrated into these three variations of cabinetry.



Overlay / Face Frame

24" deep base cabinet with a face frame structure that supports doors and drawers that close onto the face of the frame. The overall depth from the front of the cabinet door or drawer to the back of the base cabinet is approximately 24-3/4" deep.

Inset

24" deep base cabinet with doors and drawers that close within the frame structure and are flush with the face of the frame. The overall depth from the front of the cabinet door or drawer to the back of the base cabinet is 24" deep.

European / Frameless

24" deep base cabinet with no visible frame structure on the outer face of the cabinet. Doors and drawers fully cover the face frame area of the cabinet case and have minimal reveals or gaps between doors and drawers. The overall depth from the front of the cabinet door or drawer to the back of the base cabinet is 24-3/4" deep.

			FULLY INTEGRATED PANELS FOR VARYING CABINETRY TYPES			
SERIES	PRODUCT CATEGORY	MODEL NUMBER	OVERLAY / FACE FRAME	INSET	EUROPEAN / FRAMELESS	Page
2000 Series	WINE CAPTAIN® MODELS	2115WCOL	○	○	○	10
		2175WCCOL	○	○	○	11
		2275ZWCOL	○	○	○	11
3000 Series		3018WC	○	○	○	11
3036WCWC		○	○	○	11	
2000 Series	GLASS DOOR REFRIGERATORS	2175BEVCOL	○	○	○	16
2175RCGOL		○	○	○	16	
3000 Series		3018RGL	○	○	○	17
		3036RGL	○	○	○	17
3000 Series	BEVERAGE CENTERS	3036BVWC	○	○	○	13
2000 Series	REFRIGERATORS	2115RB	○	○	○	20
3000 Series		2175RCB	○	○	○	20
		3018RF	○	○	○	21
		3036RR	○	○	○	21
ADA Series	ICE MAKER	BI2115	○	*	○	23
2000 Series	CLEAR ICE MACHINE	CLR2160	○	*	○	25
2000 Series	COMBO® MODELS	CO2175F	○	*	○	28
		C2275DWROL	○	*	○	29
		CLRCO2175	○	*	○	29
2000 Series	REFRIGERATOR/ FREEZER	2175RFB	○	○	○	29

*Although the majority of 2000 Series models fit effortlessly within the standard 24" depth cabinet frame, it is recommended that careful attention is used in regard to the depth specifications located in the chart on pages 45-47. Cabinet depth can be adjusted and furred out to accommodate for any unit needing extra depth, such as those units requiring a waterline hookup.

Overlays Made Easy.

Create the kitchen of your dreams and integrate your U-line product with your cabinetry. U-Line provides a very simple and easy way to create that fully integrated look, allowing you to seamlessly blend your refrigerator, ice maker or Wine Captain® into your surrounding cabinetry.

All 2000 Series models accept a 3/4" wood overlay panel. Please note that solid door models require the purchase of an overlay kit for the wood panel to be applied. Glass door models have an overlay-ready SKU and do not require the purchase of a kit.

All Modular 3000 Series models can be ordered overlay ready, allowing for simplified application of your custom panel or frame. These models are designed to provide a completely flush and integrated installation. Robust hinges with built in door stops and adjustable doors allow for fine tuning and alignment with zero clearance. The toe kick is adjustable both vertically and horizontally, concealing the ventilation..



For a truly flush and integrated look, align your overlay panel with the bottom of the surrounding cabinetry. This is achieved by preparing the panel height per the dimensions provided in the chart. To determine the cabinet toe-kick height, measure the difference between the surface the appliance will rest on and the bottom edge of the adjacent cabinetry doors or drawers; this will provide you with the needed overlay panel height.

CABINET TOE-KICK HEIGHT	FINAL PANEL HEIGHT
3-3/4"	29-3/4"
3-7/8"	29-3/4"
4"	29-5/8"
4-1/8"	29-1/2"
4-1/4"	29-3/8"
4-3/8"	29-1/4"
4-1/2"	29-1/4"

PRODUCT DIMENSIONS (HEIGHT x WIDTH x DEPTH)	DIMENSION 'A'	DIMENSION 'B'	DIMENSION 'C'
34-1/8" x 23-15/16" x 23-1/8" to 24"	*34-1/4"	24-3/16"	24"
34-1/8" x 15" x 23-1/4" to 24"	*34-1/4"	15-1/4"	24"
34-1/8" x 14-15/16" x 23" to 23-1/8"	*34-1/4"	15-3/16"	24"
32" x 23-15/16" x 23-1/2"	*32"	24-3/16"	23-1/2"
32" x 15" x 23"	*32"	15-1/4"	23-3/4"
28-1/2" x 20-13/16" x 23" to 24"	28-5/8"	21-1/16"	24"
27-3/8" x 14-15/16" x 20"	27-1/2"	15-3/16"	21-1/2"
24-7/8" x 13-15/16" x 17"	25-1/16"	14-3/16"	18-1/2"
33-9/16" x 17-3/4" x 23 7/16"	34"	18"	24"
33-9/16" x 35-7/16" x 23 7/16"	34"	35-11/16"	24"

*An additional one inch of height is achievable with the adjustable leveling legs.

Installation Made Easy.

In preparation of the installation of your U-Line undercounter product, determining the rough opening has never been easier. Often times the purchase of a new U-Line product can be months prior to the complete readiness of the space it will occupy.

Using the dimensions provided in the table below allows you to take the necessary steps in preparing the appropriately sized space required for the ease of installation of your new U-Line.

Although it is recommended to use these dimensions, tolerances can be tightened up. In this case, we advise you to refer to the Features and Benefits document and Installation Guide. These documents can be found and downloaded from any of the product pages found at u-line.com.

At U-Line customer service is our top priority. If you have any questions or problems, contact us immediately and we will make sure they are addressed in a timely manner. Just read what our customers have to say:

“In this world of generally quick sale – your problem not mine attitude, it is refreshing to know that the management in a company like yours still believes in assisting the customer...”

- Delia C.

“Within a matter of minutes I was provided with accurate information on parts and service. (Agent) was very knowledgeable, professional and a great asset to the U-Line Company. To receive this type of service in this day and age without having to jump through hoops is unbelievable and invaluable. Your website and telephone support are awesome! I will definitely consider and recommend U-Line appliances first for future purchases. Thanks!”

- Ray S.


“I have not had any other company in my life step up and guarantee a product like you have...”

- Brenda L.


Hours of Operation: Monday - Friday 8:00 am to 6:30 pm CST
Website: www.U-LineService.com
Email: OnlineService@U-Line.com
Phone: 800-779-2547
Fax: 414-354-5696

Please have your model number and serial number readily available.
This will help us serve you faster.


Serial Number Format:

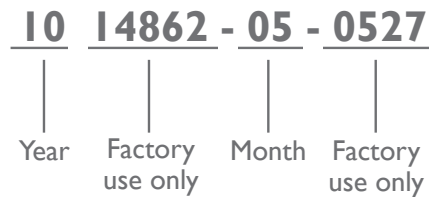

Designed, engineered and assembled in WI, USA

	WINE CAPTAIN® MODELS		BEVERAGE CENTER	GLASS DOOR REFRIGERATORS		REFRIGERATORS	
	3018WC	3036WCWC	3036BVWC	3018RGL	3036RRGL	U-3018RF	U-30306RR
Height (A)	33 9/16"	33 9/16"	33 9/16"	33 9/16"	33 9/16"	33 9/16"	33 9/16"
Width (B)	17 3/4"	35 7/16"	35 7/16"	17 3/4"	35 7/16"	17 3/4"	35 7/16"
Depth with door (C) (overlay)†	22 11/16"	22 11/16"	22 11/16"	22 11/16"	22 11/16"	22 11/16"	22 11/16"
Depth with door (C) (stainless)	23 7/16"	23 7/16"	23 7/16"	23 7/16"	23 7/16"	23 7/16"	23 7/16"
220/230V 50/60Hz CE mark							
Run amps	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Approx. shipping weight (overlay)	133 lbs	236 lbs	219 lbs	117 lbs	204 lbs	116 lbs	202 lbs
Approx. shipping weight (stainless)	139 lbs	250 lbs	231 lbs	128 lbs	214 lbs	124 lbs	207 lbs
ENERGY STAR®/ CEE Rating						 CEE Tier 3	

Specifications subject to change without notice. Sizes are for reference only. Please refer to Install Guide for specific cut-out and installation specifications. Install Guides and additional specification information is available at u-line.com.

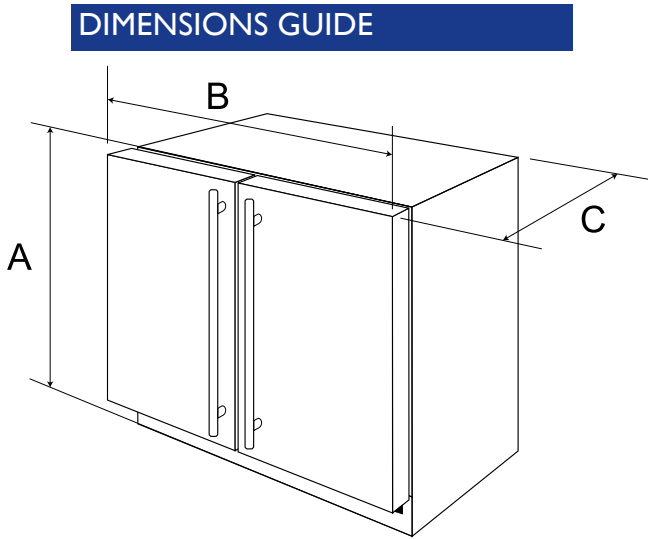

† Overlay dimensions are the same once the custom 3/4” frame is applied

U-LINE WARRANTY FOR MODULAR 3000 SERIES

U-Line's commitment to provide premium quality products and greater value for our customers is reflected in our warranty.

FULL TWO YEAR WARRANTY FOR MODULAR 3000 SERIES

From the date of purchase, U-Line covers all parts and labor required to repair or replace any product, sold and serviced within the United States and Canada, which proves to be defective in materials of workmanship.

FULL FIVE YEAR WARRANTY

From the date of purchase, U-Line covers all parts and labor to repair or replace any components that prove to be defective in the sealed system (consisting of the compressor, condenser, evaporator, bypass valve, dryer and connecting tube) for all products sold and serviced within the United States and Canada. See warranty in the Use and Care Guide for complete details.

	WINE CAPTAIN® MODELS						BEVERAGE CENTERS		GLASS DOOR REFRIGERATORS			REFRIGERATORS			
	1075WC	1115WC	1175WC	2115WC	2175WCC	2275ZWC	1075BEV	1175BEV	2175RCG	2175BEVC	ADA24RGL	1115R	1175R	2115R/ 2115RSOD	2175RC/ 2175SOD
Height (A)	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	32"	34-1/8"	34-1/8"	34-1/8"	34-1/8"
Width (B)	23-15/16"	14-15/16"	23-15/16"	15"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	14-15/16"	23-15/16"	15"	23-15/16"
Depth with door (C)	23-1/4"	23-1/8"	23-1/2"	23-1/4"	23-1/4"	23-1/4"	23-5/16"	23-5/16"	23-1/4"	23-1/4"	23-1/2"	23"	23-5/16"	23-1/4"	23-1/4"
ADA height compliant											⦿				
220/230V 50/60Hz CE mark															
Run amps	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Approx. shipping weight (black / white)		102 lbs	132 lbs	112 lbs	144 lbs	144 lbs			122 lbs	120 lbs	114 lbs	82 lbs	110 lbs	88 lbs	122 lbs
Approx. shipping weight (stainless)	134 lbs	102 lbs	134 lbs	114 lbs	144 lbs	144 lbs	126 lbs	126 lbs	116 lbs	120 lbs	116 lbs	86 lbs	110 lbs	86 lbs	116 lbs
ENERGY STAR®/ CEE Rating									⦿ CEE Tier 1	⦿ CEE Tier 1	⦿ CEE Tier 1		⦿ CEE Tier 3	⦿ CEE Tier 1	⦿ CEE Tier 3

Specifications subject to change without notice. Sizes are for reference only. Please refer to Install Guide for specific cut-out and installation specifications. Install Guides and additional specification information is available at u-line.com.


METRIC CONVERSIONS

- 1 inch = 2.54 centimeters
- 1 pound = .45 kilograms
- 1 cubic foot = 28 liters

CELSIUS CONVERSIONS

- 0°F = -17.77°C
- 5°F = -15°C
- 34°F = 1.11°C
- 38°F = 3.33°C
- 40°F = 4.44°C
- 45°F = 7.22°C
- 60°F = 15.55°C

DIMENSIONS GUIDE

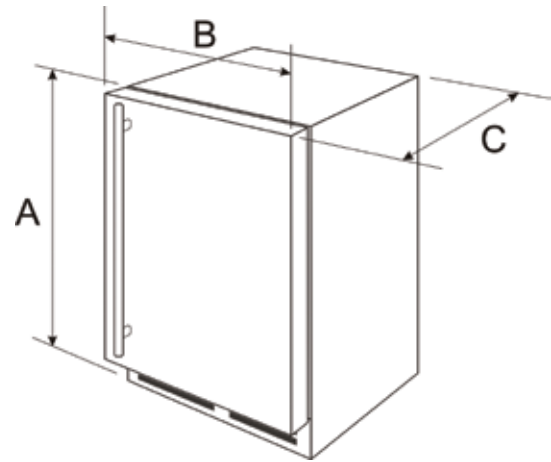

REFRIGERATORS			ICE MAKERS				ICE MACHINES	COMBO® MODELS						
2275DWRC	29R	ADA24R	BI95	BI98	ADA151M	BI2115/ BI2115SOD	CLR2160/ CLR2160SOD	CO29	CO29F	CO1175	CO2175F	2175RF	CLR- CO2175	C2275D- WR
33-7/8"	28-1/2"	32"	25-1/6"	27-3/8"	32"	34-1/8"	34-1/8"	28-1/2"	28-1/2"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34"
23-15/16"	20-7/8"	23-15/16"	13-15/16"	14-15/16"	15"	15"	15"	20-13/16"	20-13/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"
23-1/4"	23"	23-1/2"	18-1/2" *	21-1/2" *	23-3/4" *	23-7/8" *	24" *	24" *	24" *	23-1/2" *	23-1/4" *	23-1/4"	24" *	23-5/8" *
	⦿	⦿	⦿	⦿	⦿			⦿	⦿					
			⦿	⦿		⦿		⦿		⦿				
2.4	2.4	2.4	2.5	2.5	2.5	2.5	4.0	2.5	2.5	2.5	2.5	2.5	4.0	2.5
152 lbs	92 lbs	114 lbs	66 lbs	76 lbs	86 lbs	94 lbs	100 lbs	98 lbs	104 lbs	117 lbs	136 lbs	130 lbs	143 lbs	158 lbs
159 lbs		116 lbs			88 lbs	92 lbs	100 lbs			119 lbs	132 lbs	124 lbs	137 lbs	162 lbs
⦿ CEE Tier 2	⦿ CEE Tier 1	⦿ CEE Tier 3												

Specifications subject to change without notice. Sizes are for reference only. Please refer to Install Guide for specific cut-out and installation specifications. Install Guides and additional specification information is available at u-line.com.

U-LINE'S OUTDOOR LIMITED WARRANTY

Shall apply to U-Line models deemed suitable for outdoor use by Underwriters Laboratory (UL) as noted in the U-Line Product Catalog.

U-LINE WARRANTY

U-Line's commitment to provide premium quality products and greater value for our customers is reflected in our warranty.

FULL ONE YEAR WARRANTY
From the date of purchase, U-Line covers all parts and labor required to repair or replace any product, sold and serviced within the United States and Canada, which proves to be defective in materials of workmanship.

FULL FIVE YEAR WARRANTY
From the date of purchase, U-Line covers all parts and labor to repair or replace any components that prove to be defective in the sealed system (consisting of the compressor, condenser, evaporator, bypass valve, dryer and connecting tube) for all products sold and serviced within the United States and Canada. See warranty in the Use and Care Guide for complete details.

*Depth dimension includes space for water line connection.